



SINGLE ACTING LOW HEIGHT CYLINDERS, SPRING RETURN




- ✓ Low height hydraulic cylinders with a capacity from 10 to 90 ton, stroke up to 62 mm, rated for 700 bar.
- ✓ Low profile for use in confined spaces: machinery positioning, tool fastening, load tests.
- ✓ Nickel plated piston with wiper seal to extend cylinder life.
- ✓ Optional tilt saddles available.
- ✓ Strong spring for improved retraction time.

Capacity		Stroke	Model	Oil Cap.	A	B	D	E	F	H	K	
ton	kN	mm	LARZEP	cm ³	mm	mm	mm	mm	mm	mm	mm	
10	101	38	SSP01004	55	88	126	69	42,9	38,1	17	5	
20	201	45	SSP02004	129	98	143	92	60,5	50,8	17	3	
30	295	62	SSP03006	261	117	179	101	73,2	66,5	19	3	
45	435	60	SSP05006	373	122	182	124	88,9	69,8	23	2	
90	887	57	SSP10006	722	141	198	165	127,0	92,2	31	1	



SSP spring return

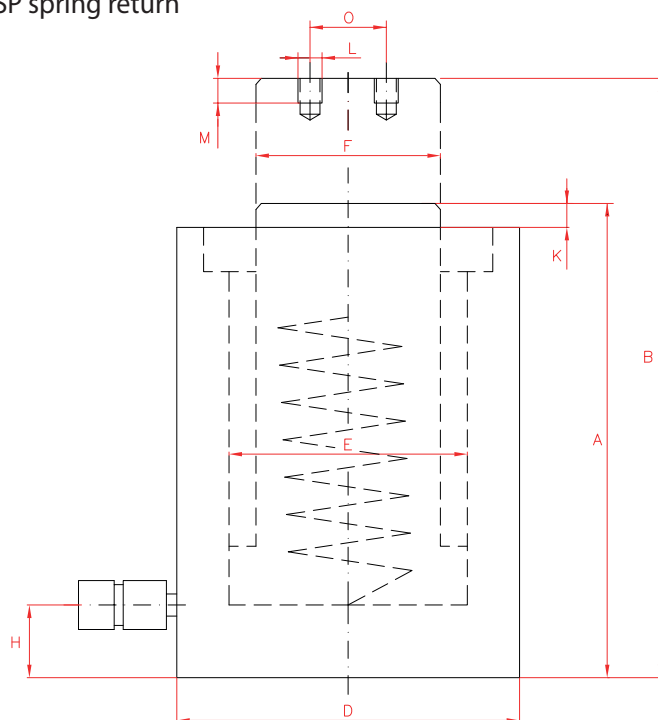

	L	M	O	Area	Weight	Model	With tilting saddle	
	mm	mm	mm	cm ²	kg	LARZEP	A	Model
	M4	8	26	14,5	2,7	SSP01004	108	CATS13
	M5	8	40	28,7	5,0	SSP02004	124	CATS53
	M5	8	40	42,1	6,8	SSP03006	143	CATS53
	M5	8	40	62,1	10,0	SSP05006	148	CATS53
	M8	10	55	126,7	20,7	SSP10006	176	CATS103

SINGLE ACTING CYLINDERS

Type **SSP**Capacity **10 - 90 ton**Stroke **38-62 mm**Max. pressure **700 bar****J**
Cylinder and pump sets

P.60

SSX
Single Acting Low Profile Cylinders

P.24

AZ3
Coupler inclined 10°

P.86

CATS
Optional Tilting Saddles

P.90