

## P/N 75650/20

AISI 316 stainless steel manual hose reel s. 560, for hot water, 100 bar, without hose. Inlet-outlet G 1" (f)

### SECTORS OF USE


Agriculture, Cleaning, Industry, Mining, Lube trucks and transports

### FEATURES

|                   |                                                                           |
|-------------------|---------------------------------------------------------------------------|
| Pressure          | 100 bar                                                                   |
| Compatible fluids | water max 130 °C, oils and similar products, grease, diesel fuel, AdBlue® |
| Swivel joint      | AISI 316 stainless steel                                                  |
| Seals             | Viton®                                                                    |
| Characteristic    | hydraulic                                                                 |
| Material          | AISI 316 stainless steel                                                  |
| Couplings         | -                                                                         |
| Hose              | -                                                                         |
| Ø e hose length   | -                                                                         |
| Inlet             | G 1" (f)                                                                  |
| Outlet            | G 1" (f)                                                                  |
| Reel flow path    | AISI 316 stainless steel                                                  |



### OVERALL DIMENSIONS (mm)

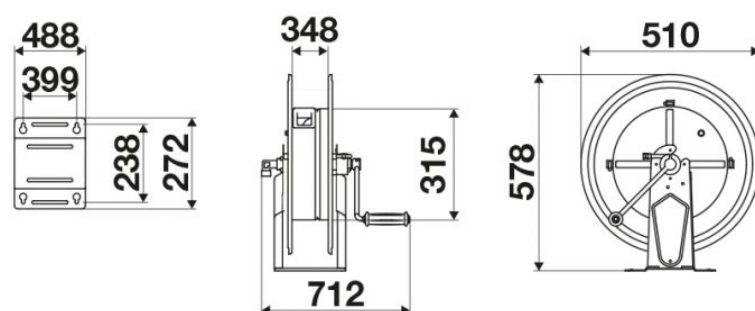

### FURTHER FEATURES

| Capacity 1/4" | Capacity 5/16" | Capacity 3/8" | Capacity 1/2" | Capacity 5/8" | Capacity 3/4" | Capacity 1" |
|---------------|----------------|---------------|---------------|---------------|---------------|-------------|
| 320 m         | 240 m          | 140 m         | 100 m         | 90 m          | 60 m          | 30 m        |